

製品仕様書

機 種 名		KG-100		KG-200	
定 格 電 圧		AC100V (50/60Hz)		AC200V～AC240V (50/60Hz)	
使 用 電 圧 範 囲		定格電圧±10%			
消 費 電 流		0.32A		0.11A (AC200V 時) 0.13A (AC240V 時)	
消 費 電 力		31.0W		23.0W (AC200V 時) 31.0W (AC240V 時)	
閃 光 数		200 回/分		200 回/分 (AC200V 時) 250 回/分 (AC240V 時)	
使用電球	仕 様	120V40W		240V30W	
	口金・バルブ	BA15D・RP35			
使 用 温 度 範 囲 (相 対 湿 度)		-30℃～+60℃ (90%RH 以下)			
取 付 方 向		屋内	正・逆・横	屋外	正方向のみ
保 護 特 性		IP23			
耐 振 動 性		45m/s ² (JISD1601-1995 45 段階 3 種/B 種に合格)			
絶 縁 抵 抗		電源充電部と非充電金属間 DC500V メガにて 1MΩ 以上			
耐 圧		電源充電部と非充電金属部間 以下の電圧にて 1 分間			
		AC1000V		AC1500V	
裸 光 度		1000cd		200cd (AC200V 時) 400cd (AC240V 時)	
予 備 球		無し			
質 量		0.9kg			
N o . KG-100-PDFD-1/2					

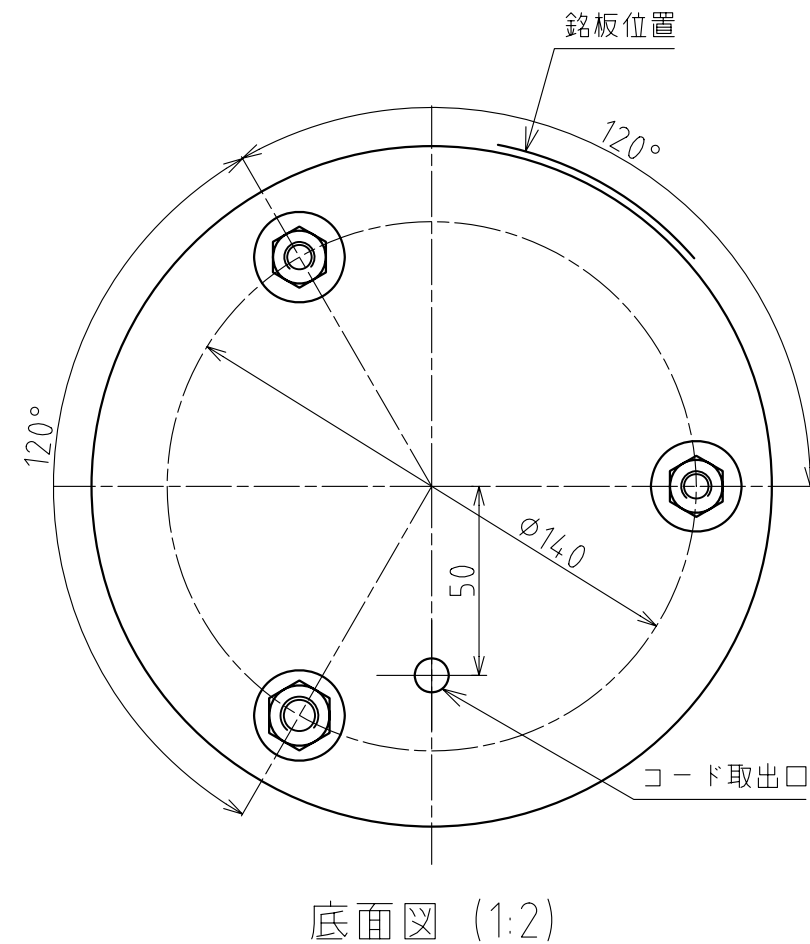
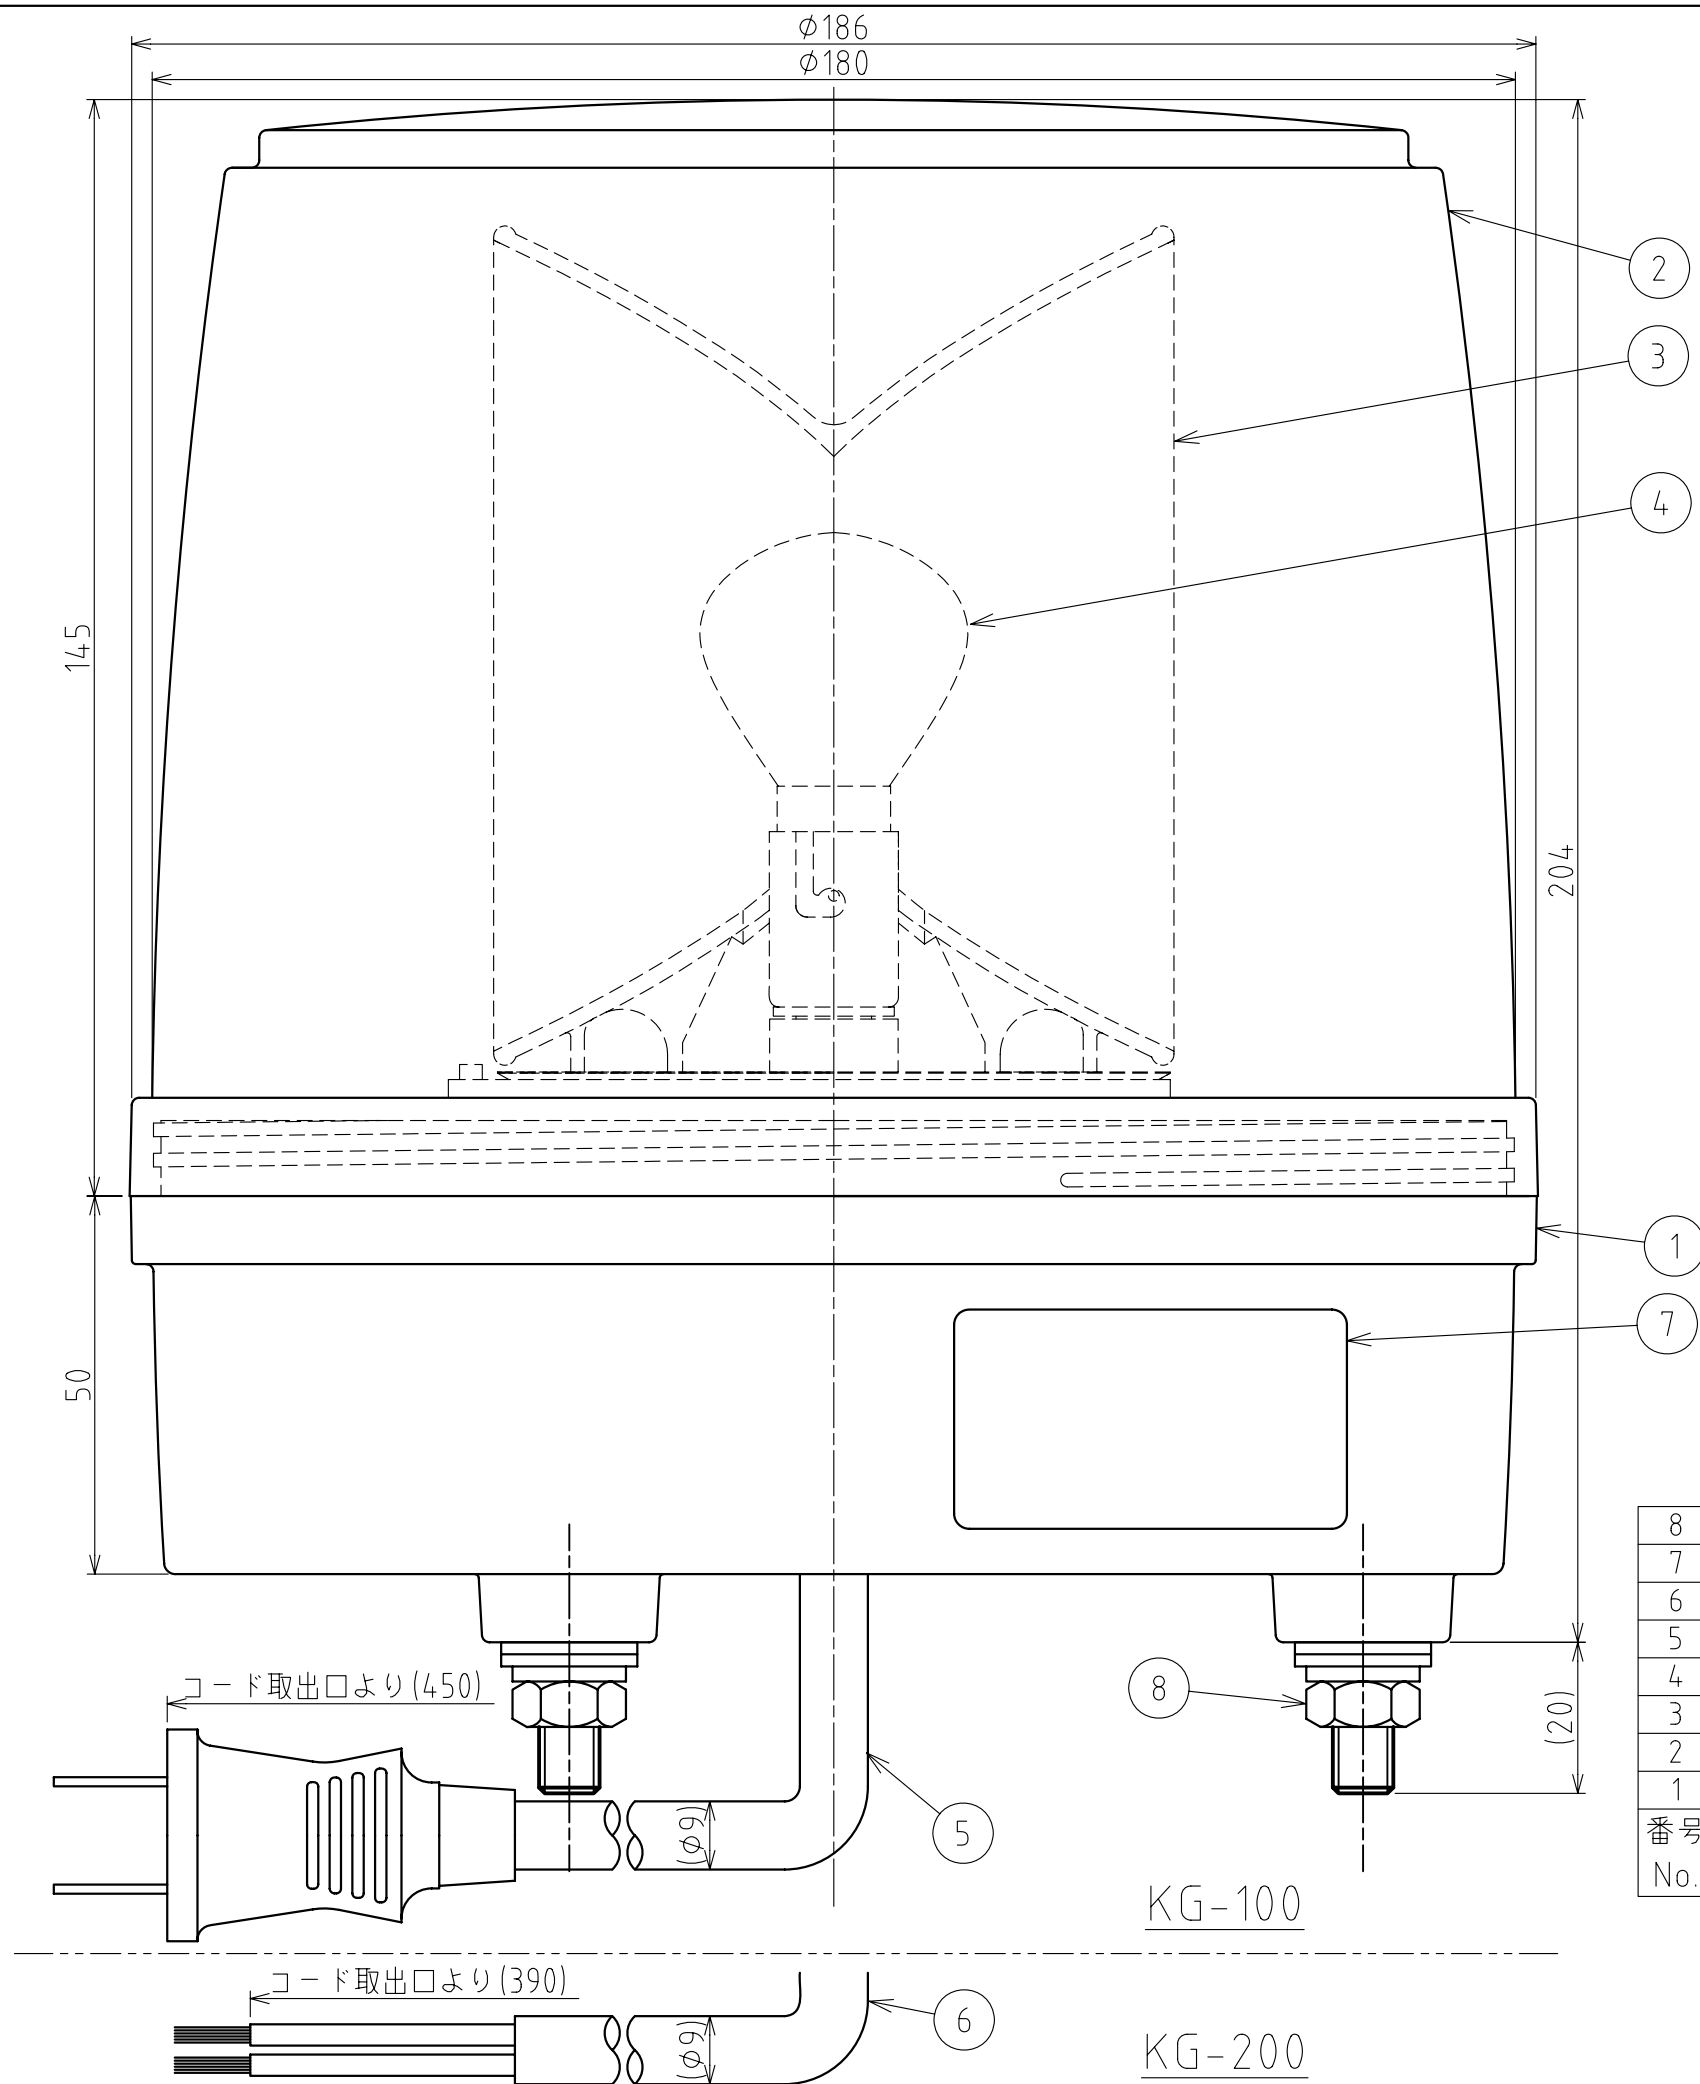


表1

グローブ色	材料
赤	AS樹脂
黄	PS樹脂
青	AS樹脂

8	六角ナット	-	3	M8, MFZn-C	
7	銘板	-	1		
6	ビニルキャブタイヤケーブル	-	1	VCT, 0.75mm ² x2C	KG-200
5	ビニルキャブタイヤケーブル	-	1	VCTプラグコード付, 0.75mm ² x2C	KG-100
4	電球	-	1		仕様書参照
3	反射鏡	-	1	PC樹脂, アルミ真空蒸着	
2	グローブ	-	1	表1参照	
1	ケース	-	1	ABS樹脂, 黒	
番号 No.	部品名 Part Name	品目コード Part No.	数量 Qty.	材料 & 寸法 & 処理 Material & Size & Finish	記事 Remarks

KG-100/200型 外観寸法図

株式会社 パトライト
PATLITE Corporation

KG-100-PDFD-2_2